



TALAN™

TELEPHONE AND LINE ANALYZER

DPA 7000 PATENTS PENDING



TALAN™

TELEPHONE AND LINE ANALYZER
PATENTS PENDING

The TALAN represents a new state-of-the-art capability to rapidly and reliably detect and locate illicit wire taps on both digital and analog telephone systems.



The TALAN provides a suite of tools in a single piece of equipment to accurately analyze phone lines for taps and other eavesdropping threats.



TALAN™

TELEPHONE AND LINE ANALYZER
PATENTS PENDING

Analyze digital and analog phone systems and wires for eavesdropping threats.

Combines New Technology Into a Suite of Telephone Tests Including an Automatic Switching Matrix


The TALAN provides the capability to perform multiple tests to analyze communication lines for eavesdropping devices.

The TALAN includes a built-in automatic switching matrix for testing all pair combinations. For example, if a cable has 8 conductors, there are 28 combinations of pairs to test; the TALAN can automatically switch through all combinations, performing test functions and storing data for comparison.

Digital Demodulation

Includes digital decoding capabilities for approximately 80% of the world's digital phone systems. Demodulation codecs are upgradable as new phone systems become available.


The Digital Demodulation function provides the ability to determine if a digital phone line is passing audio when it should not.

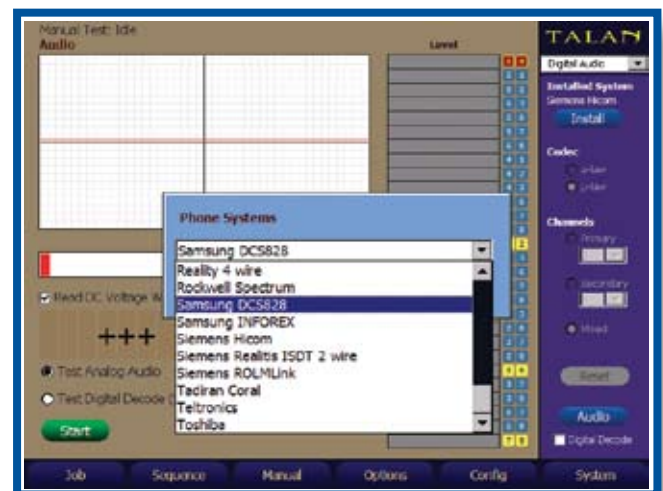

Frequency Domain Reflectometer (FDR)

Similar to a TDR (Time Domain Reflectometer) but based on a different technical approach, the TALAN's FDR can "shoot" a line for impedance anomalies indicating a tap on the wire.

The FDR also has the ability to plot multiple FDR traces on the same display for comparison of multiple pairs for historical comparison.

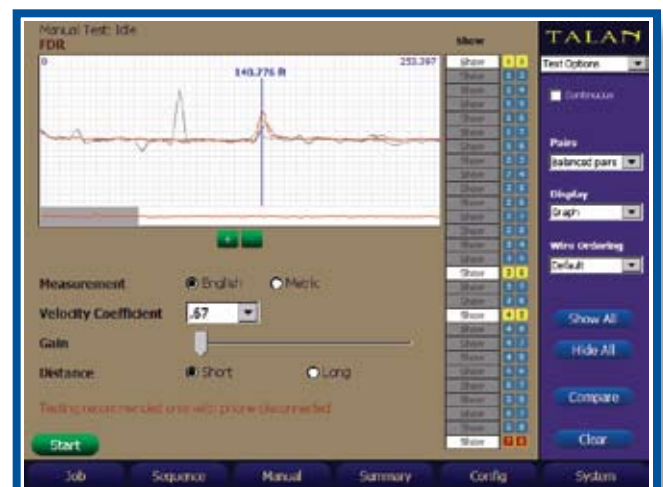


Non-Linear Junction Detection (NLJD) on a Line

The TALAN includes a NLJD test to detect electronics connected to an isolated line.

This is one of the most powerful tests for quickly determining whether or not there are additional electronics attached to a wire.

The example to the right indicates a parallel tap on pair 4:5. Because of the coupling in balanced pairs, any combination with either a 4 or 5 indicates some response, but the electronics are clearly detected on pair 4:5.

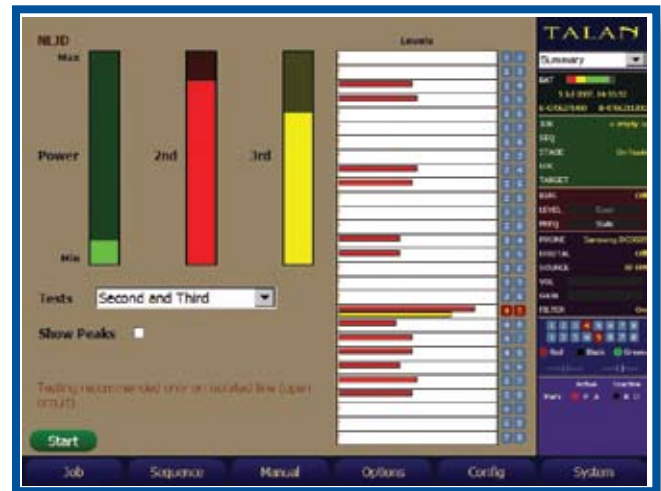

Digital Multimeter Tests

The TALAN includes basic multimeter tests such as Voltage, Current, Capacitance, & Resistance.

The automatic switching matrix allows the user to quickly measure and display results for all pair combinations, easily identifying any anomalies.



High Gain Audio Amplifier and Built-in Audio Oscilloscope

The TALAN includes a High Gain Audio Amplifier (20Hz to 20KHz) with up to 80dB of total system gain (voice band).

A DC Bias Voltage Generator ($\pm 80\text{VDC}$) is also provided to power attached electronics.




RF Analysis and Detection

The TALAN includes a Spectrum Analyzer that provides a detailed frequency spectrum display up to 85 MHz. This function also includes a time domain display to show the modulation for AM and FM signals.

The TALAN also includes a Broadband RF Probe to check free space RF energy up to 8GHz, graphing the RF level over time to identify the location of a transmitter.


(Broadband RF levels not shown)

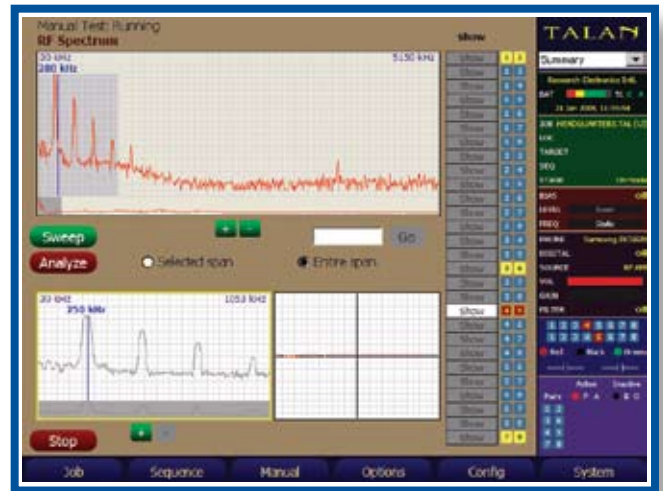

Multi-Test Database System

The TALAN provides the ability to store test data for all testing functions in a database structure. This database provides the ability to organize and store results for future review or comparison.

The display at the right shows the basic database structure keeping track of test data from multiple targets and locations.

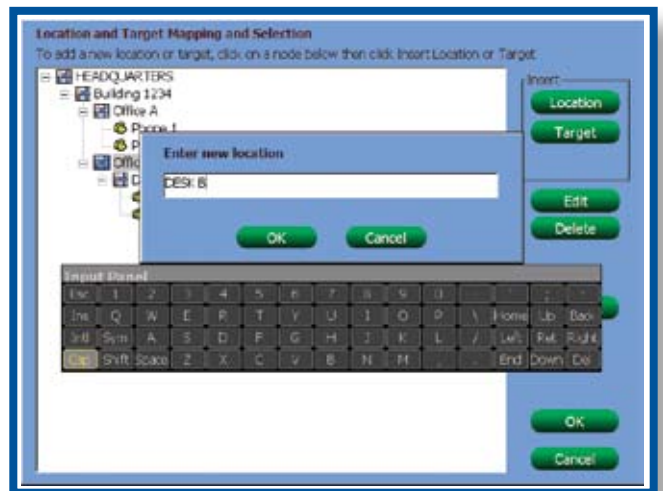

Harmonic Locator Probe (HLP)

The TALAN includes a Harmonic Locator Probe (HLP) used for tracing wires.

The Harmonic Locator Probe also acts as a Harmonic Receiver, alerting the user as the tracer approaches electronics connected to a wire. This allows the user to not only trace a wire, but also determine the location of any electronics connected to the wire such as an eavesdropping device.



Close-up of HLP display showing wire-trace level (green) and 2nd harmonic response level (red) indicating electronics.



TALAN™

TELEPHONE AND LINE ANALYZER

PATENTS PENDING

TALAN ADVANTAGES

COMPLETE SUITE OF TESTS
 COMBINES EXISTING TESTING TECHNOLOGY AND NEW TECHNOLOGY INTO SINGLE PIECE OF EQUIPMENT

AUTOMATIC SWITCHING MATRIX

DIGITAL MULTIMETER TESTS

FDR FREQUENCY DOMAIN REFLECTOMETER
 DETECTS IMPEDANCE ANOMALIES SUCH AS AN EAVESDROPPING TAP ON A WIRE

LINE NLJD

DETECTS ELECTRONICS ATTACHED TO A WIRE

DIGITAL DEMODULATION

CONFIRMS WHETHER A LINE IS PASSING AUDIO



TSCM TRAINING BY REI INSTRUCTORS

REI operates the largest commercially available TSCM training facility in the world. On-site training also available.

Course Dates and Registration online at www.reiusa.net or email sales@reiusa.net



RESEARCH ELECTRONICS INTL.
 455 SECURITY DRIVE

ALGOOD TN 38506 USA

TEL +1 931.537.6032 • 800.824.3190 (US ONLY)

FAX +1 931.537.6089

sales@reiusa.net • www.reiusa.net

TECHNICAL SPECS

CONTROL SYSTEM

Primary Computer: 32bit RISC processor, 520MHz
Internal Memory: 64MB SDRAM (OS), 64MB Flash
External Memory: Compact Flash Type III, USB mass storage

DIGITAL I/O

Network: 10/100 Ethernet Controller for future use
USB: USB Device (A Type) supports external keyboard, mouse, and USB mass storage device; USB Host (B type) for future use.

ANALOG I/O

Headphone Output: 3.5mm connector
Microphone Input: 3.5mm input

USER INTERFACE

Hard Keys: 6 Soft Menu Keys, 5 Button Quadrant Navigation & other dedicated keys
Encoder: High-Resolution Optical Encoder
Integrated Touch Screen with Stylus
Test Inputs:

- Dual MOD8: Supports 2, 4, 6, & 8 wire Modular Phone Jacks
 - Banana Type: Standard sleeved sockets: Ring, Tip, and Earth
 - SMB RF Input: RF/Antenna Connection to 8 GHz Broadband Detector
 - Expansion Port: Supports communication and measurement for use with future accessories
- All Inputs Electrically Isolated

RF SYSTEM

Spectrum Analyzer:
 Dual Conversion, Super-Heterodyne Receiver
 Frequency Range: 30kHz to 85MHz
 Sweep Time: 2 Seconds
 Step Size: 1kHz
 Bandwidth: 18kHz
 Sensitivity: -100dBm

Broadband Detector:

RF SMB Input: To 8GHz
 Line Level Test: 100kHz to 600MHz
 Sensitivity: -65dBm

DIGITAL MULTIMETER

Quick Response Auto-Ranging: 500msec Sample Rate
AC/DC Volts: 0 to 250V Maximum
Resistance: 0 to 40 MegOhm
Capacitance: 4nF to 4.2µF

BIAS GENERATOR

Optically Isolated, Direct Digital Control: High voltage DAC
Output Ceiling: ±80V
Modulation: Fixed voltage, or variable rate Sinewave (10Hz - 300Hz).

AUDIO

Audio Bandwidth: 20Hz - 20KHz
Gain: Up to 80dB total system gain
AGC: Digitally Controlled Automatic Gain
Filter: Analog Voice band filter (300Hz to 3kHz)

POWER SYSTEM

External Input: 15VDC @3A
Universal Power Supply: 100-240VAC, 50-60Hz
Removable Battery: Rechargeable Lithium ion, 4-6 hours of run time

MECHANICAL

Dimensions: 10.0in x 12.9in x 2.7in
 (25.4cm x 32.8cm x 6.9cm)
Weight with Battery: 6 lbs (2.7 kg)
Case Dimensions: 5.4in x 14.9in x 19.5in
 (13.7cm x 37.8cm x 49.5cm)
Loaded Case Weight: 19.0 lbs (7.1kg)
Operating Temperature: 0°C to +50°C

HARMONIC LOCATOR PROBE

Operational Frequency: 225kHz & 450kHz
Antenna Type: Balanced Loopstick
Headphone Audio Output: 16ohm, 105dB SPL limited
Battery: 9V Alkaline
Run-Time: 10 hours average, 22 hours (headphones)
Size: 17.5in x 1.5in (44.45cm x 3.8cm) stored
 63.75in x 1.5in (162cm x 3.8cm) fully extended
Weight: 1lbs (.5kg)

